

IRC : 31 1969

ROUTE MARKER SIGNS FOR STATE ROUTES



THE INDIAN ROADS CONGRESS

1985

ROUTE MARKER SIGNS FOR STATE ROUTES

Published by

THE INDIAN ROADS CONGRESS

Jamnagar House, Shahjahan Road

New Delhi-110 011

1985

Price Rs. 80/-
(Plus Packing & Postage)

IRC:31-1969

First published : August, 1969

Reprinted : July 1985

Reprinted : October, 2009

(Rights of Publication and of Translation are Reserved)

ROUTE MARKER SIGNS FOR STATE ROUTES

1. INTRODUCTION

1.1. On the recommendation of the Planning Commission, States have declared certain through routes within their respective jurisdictions as State Routes and assigned them route numbers. It has been considered desirable for various reasons that route marking signs should be fixed along State Routes.

1.2. To ensure that a uniform type of route marker sign is used on all State Routes in India, the type design given herein has been prepared by the Specifications and Standards Committee (personnel given on inside front cover). The design was approved by the Executive Committee in their meeting held in March 1969 and later by the Council of the Indian Roads Congress in their meeting held at Bhubaneswar on the 26th and 27th May, 1969 for general adoption.


2. DESIGN

2.1. A 'State Route' marker sign shall consist of a shield marked on a rectangular plate 450 mm by 600 mm. The design is given in Plate 1.

2.2. The border of the shield shall be in black. The upper portion of the shield within the black border shall have a brilliant green background, the colour conforming to the Indian Standard Colour No. 221. The name of the State in full or in an abbreviated* form, shall appear in white over the green background. The background of the lower portion shall be white. The letters 'SR' (State Route) and numerals of the route number shall be in black on this white background.

2.3. The size, shape and spacing of letters and numerals shall conform to those given in Fig. 1 and Plates 1, 5 and 6.

* N.B.—Names of States upto five letters in length can be accommodated in full on the shield. For longer names, thinner letters (the height however remaining 80 mm) or suitable abbreviations may be used.

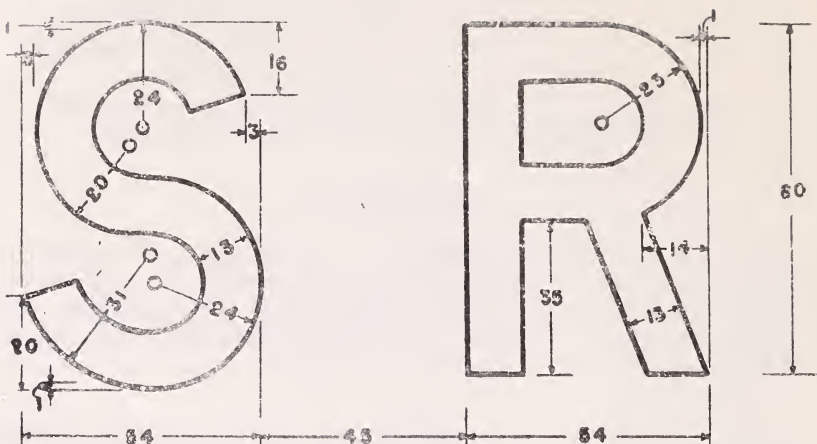

STANDARD LETTERS
'S' AND 'R' OF 80 mm HEIGHT

(ALL DIMENSIONS ARE IN MILLIMETRES)




Fig. 1

3. LOCATION

3.1. The sign shall be erected on State Routes ahead of their intersections with other important roads, immediately after the intersections as confirmatory signs, and at such other points that may be considered necessary to guide the through traffic, e.g., at suitable places through built-up areas.

3.2. The route markers shall be erected as indicated in the drawing titled "Arrangement for Erection of State Route Marker Signs", Plate 2.

3.3. On roads without kerbs, they shall have a clear distance of 2 to 3 metre between the post and the edge of the carriageway. On roads with kerbs, the sign post shall not be less than 60 cm away from the edge of the kerb. To avoid specular reflection from the sign face, the sign shall be turned slightly away from the road as indicated in Plate 2.

3.4. The sign shall be erected on the State Route at a distance of 100 to 150 metre ahead of the junction on the left hand side of the road as one approaches the junction.

4. DEFINITION PLATE

4.1. When the sign is erected at a junction, the direction which the State Route takes at the junction shall be indicated on a definition plate of the size 300 mm by 250 mm fixed below the shield as shown in Plate 2.

4.2. Background colour of the definition plate shall be white. The border and the arrow shall be in black.

4.3. Some type designs of arrows for use on the definition plate in different situations are given in Plate 3.

5. ROUTE MARKER ASSEMBLY AT JUNCTIONS WITH NUMBERED ROUTES

5.1. When a numbered route intersects or takes off from a State Route, indication about the number of the intersecting route may be provided by erecting, ahead of the intersection, its route marker sign along with the marker of the State Route being travelled upon. Such auxiliary markers shall be mounted on the same post as carrying the regular route marker and be accompanied by a definition plate carrying a single- or a double-headed arrow pointing in the general direction or directions in which that route may be followed.

5.2. The manner of putting up such assemblies is illustrated through two examples given in Plate 4.

6. COLOUR OF BACK OF SIGN AND POST


Similar to other traffic signs, the reverse side of all route marker signs should be painted in unobtrusive grey, Indian Standard Colour No. 630. The sign post should be painted in 25 cm bands, alternately black and white, with lowest band next to the ground being black.

7. MATERIALS


The sign may be made of either enamelled or painted steel plate.







Digitized by the Internet Archive
in 2014

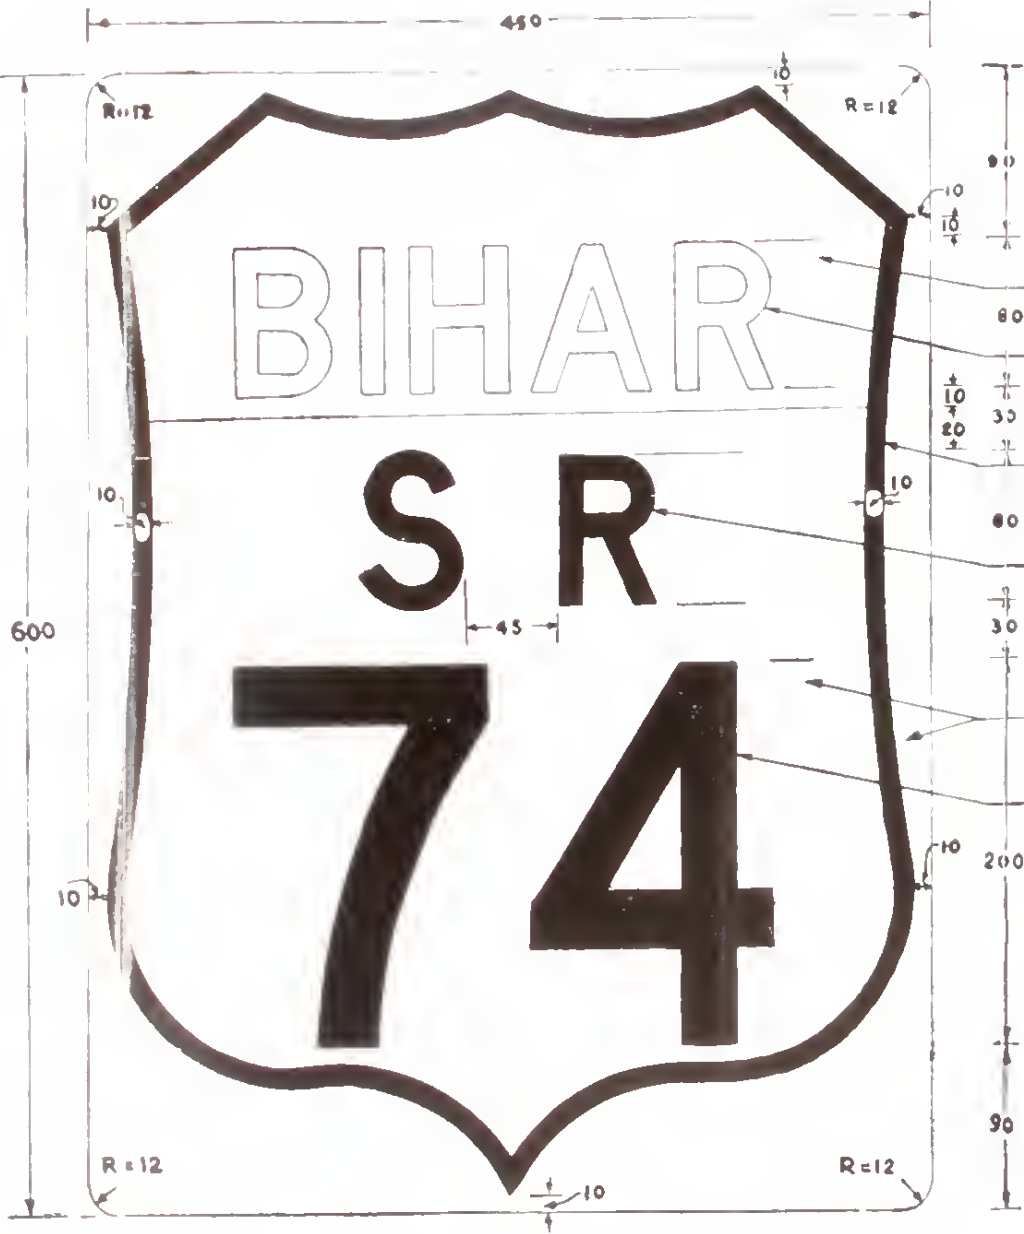

ALL DIMENSIONS ARE IN MILLIMETRES

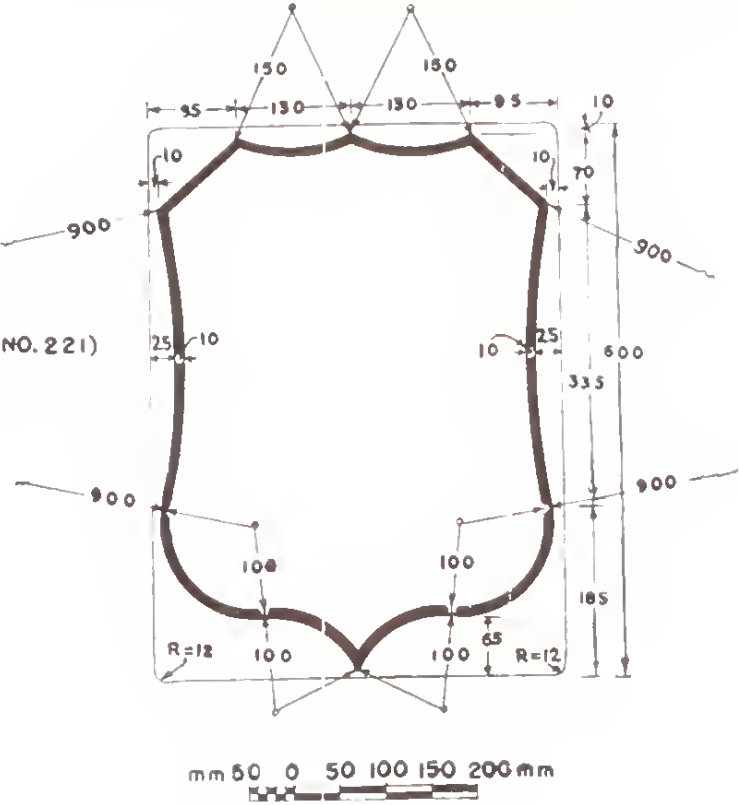




STATE ROUTE MARKER SIGN

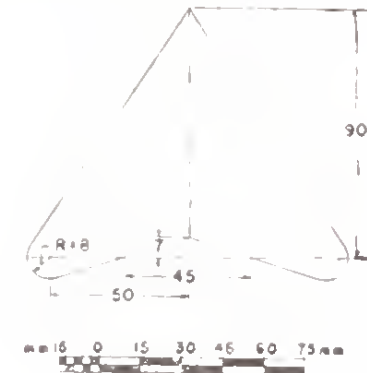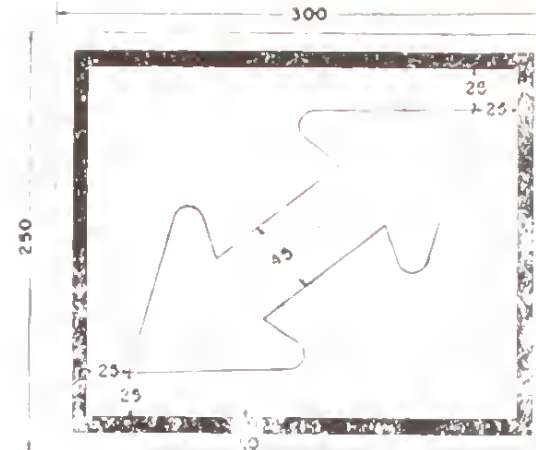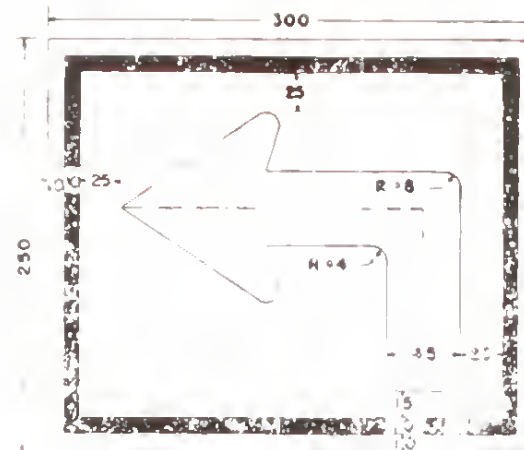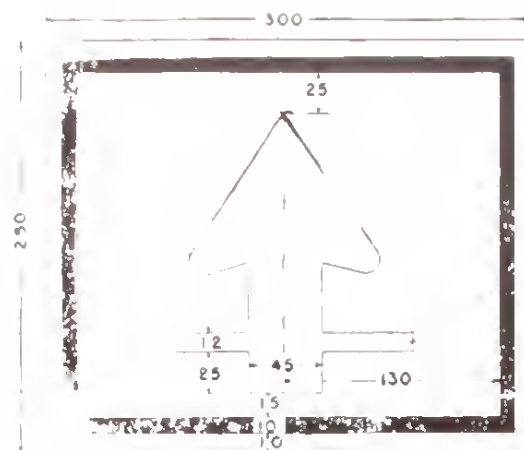

ARROW AND BORDER BLACK

BACKGROUND WHITE

DETAILS OF ARROWHEAD

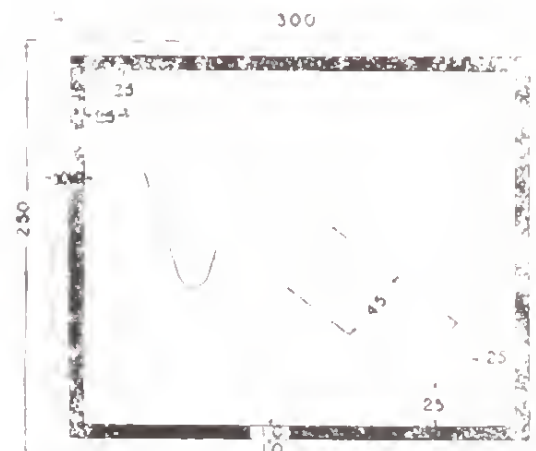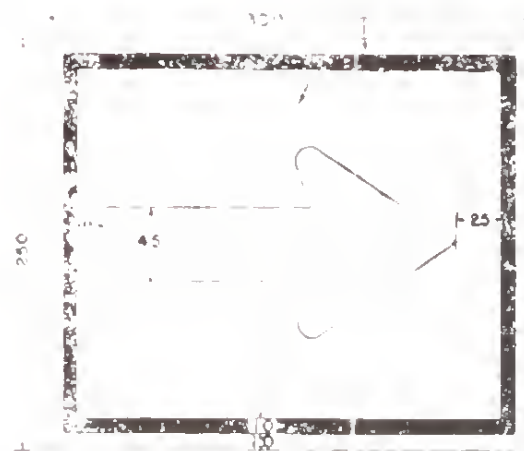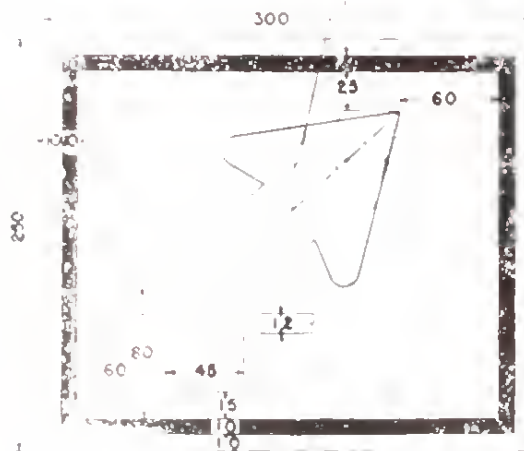


NOTES

- ALL DIMENSIONS ARE IN MILLIMETRES
- BACKGROUND COLOUR SHALL BE WHITE AND THE BORDER AND ARROW IN BLACK
- ARROWS GIVEN IN THIS PLATE ARE ONLY EXAMPLES FOR OTHER SITUATIONS ARROWS COULD BE SUITABLY EVOLVED ON SIMILAR LINES

DETAILS OF TYPICAL ARROWS FOR USE ON THE DEFINITION PLATE




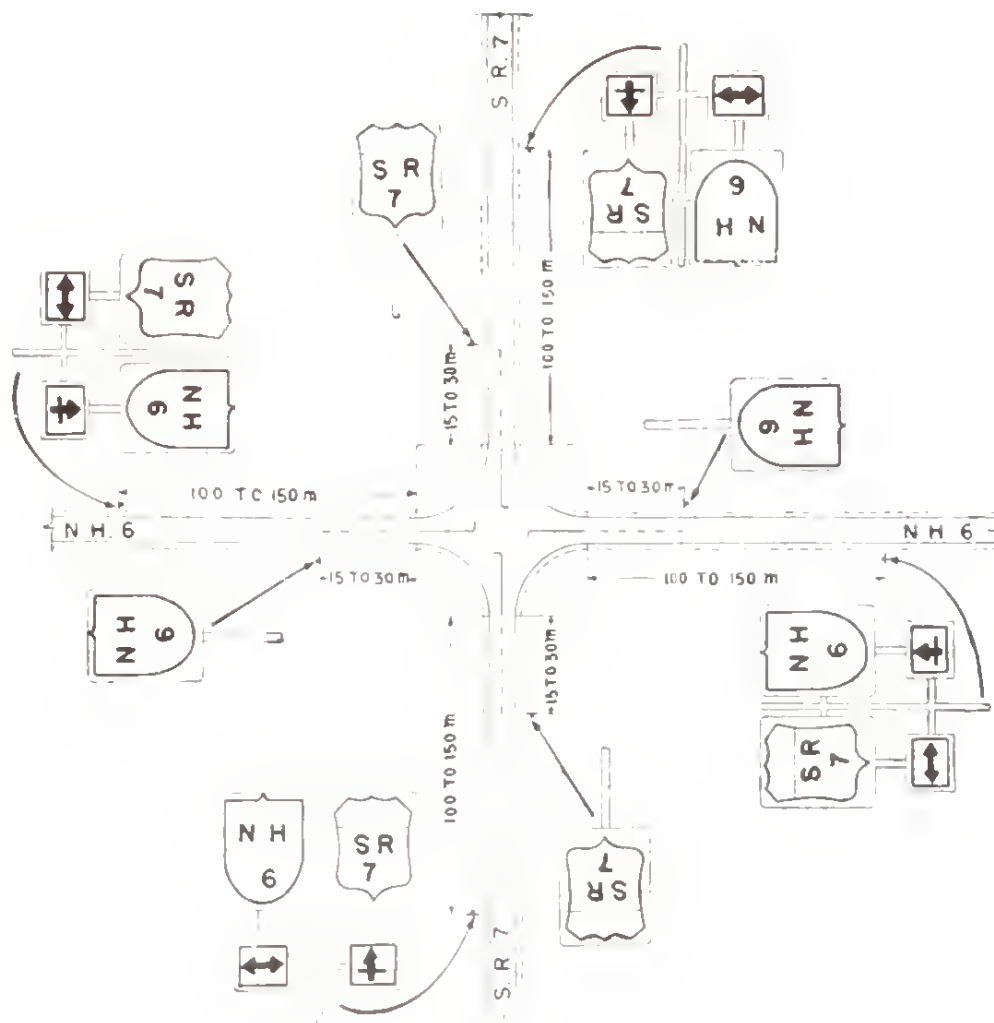

EXAMPLE 1


NOTE

THE EXAMPLES GIVEN ABOVE ARE FOR THE CASE WHEN THE INTERSECTING ROUTE IS A STATE ROUTE. THE ROUTE MARKER ASSEMBLY WILL BASICALLY BE THE SAME WHEN THE INTERSECTING ROUTE IS A NATIONAL HIGHWAY OR OF SOME OTHER CLASSIFICATION, THE ONLY DIFFERENCE BEING IN THE SHIELD.

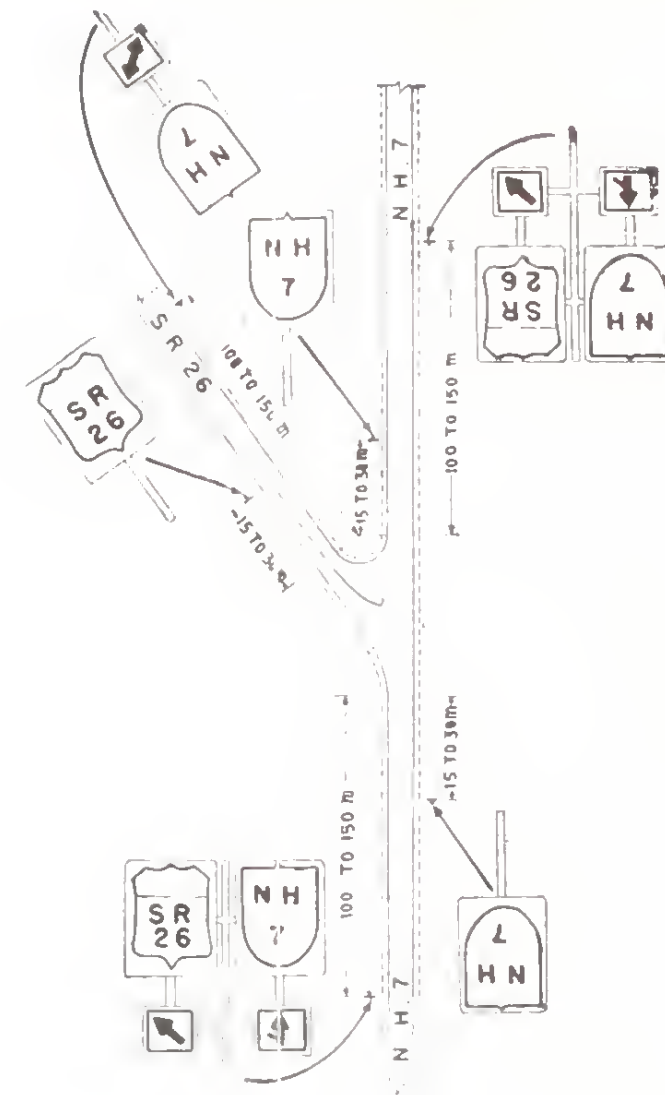

EXAMPLE 2

ROUTE MARKER ASSEMBLY AT JUNCTIONS OF STATE ROUTES WITH OTHER NUMBERED ROUTES

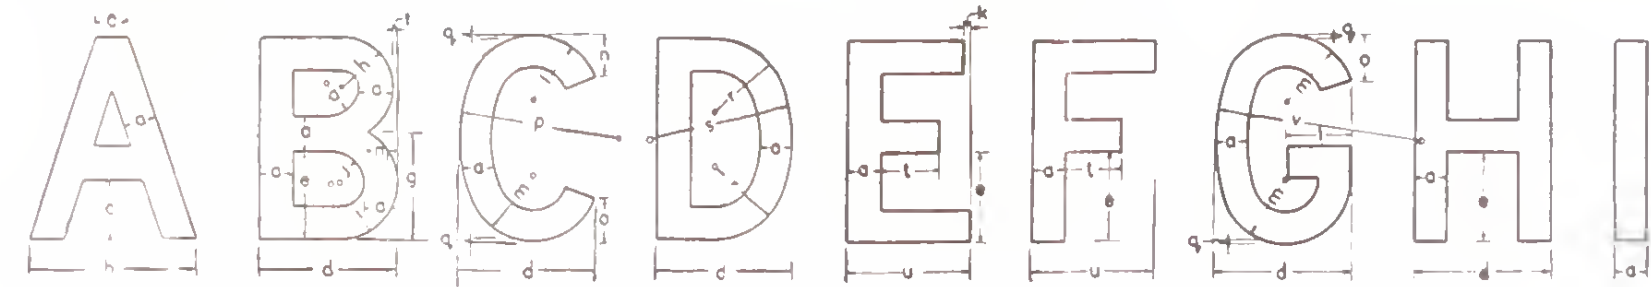

DIMENSIONS IN MILLIMETRES FOR 8 cm HIGH LETTERS														
a	a ₁	b	b ₁	c	c ₁	d	d ₁	e	e ₁	f	f ₁	g	g ₁	h
13	31	67	55	23	62	54	46	35	27	2	11	42	6	20
h ₁	i	i ₁	j	j ₁	k	k ₁	l	l ₁	m	m ₁	n	n ₁	o	o ₁
4	22	14	13	24	3	25	26	3	26	60	16	10	18	70
p	p ₁	q	q ₁	r	r ₁	s	s ₁	t	t ₁	u	u ₁	v	v ₁	z
63	51	1	64	29	11	56	8	23	49	80	12	14	50	28

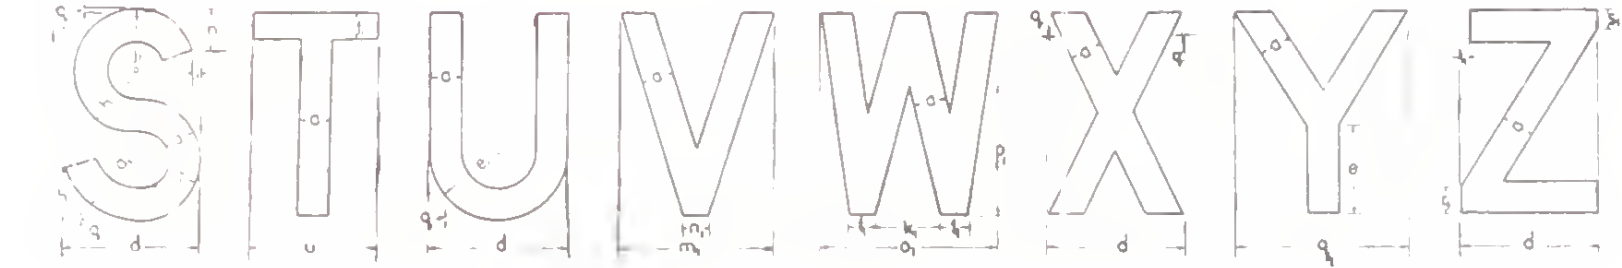
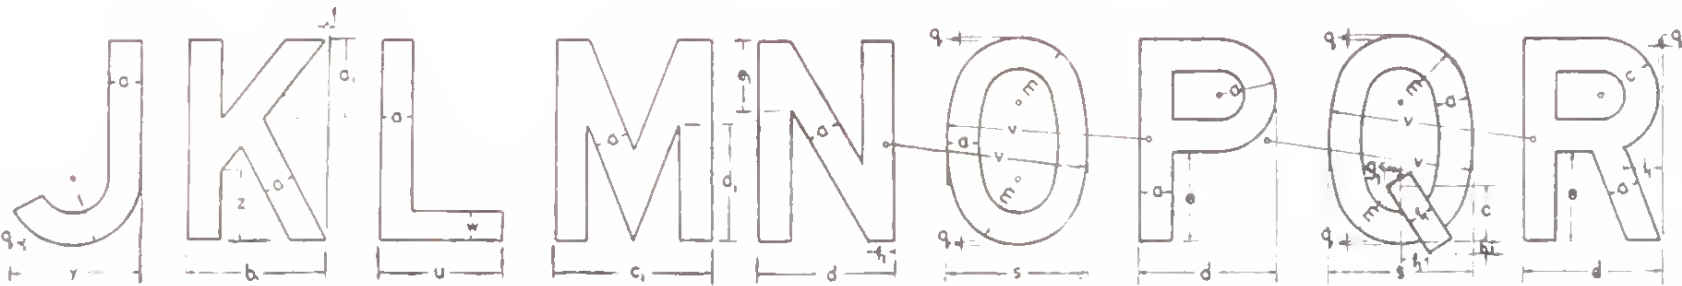


TABLE 1
LETTER TO LETTER CODE NUMBER

PRECEDING LETTER	FOLLOWING LETTER			
	B, D, E, F, H, I, K, L, M, N, P, Q, R, S, T, U, V, W, X, Y, Z	C, G, O, Q, S, T, U, V, W, X, Y, Z	A, J, L, M, N, P, Q, R, S, T, U, V, W, X, Y, Z	
A	2	2	4	
B	1	2	2	
C	2	2	3	
D	1	2	2	
E	2	2	3	
F	2	2	3	
G	1	2	2	
H	1	1	2	
I	1	1	2	
J	1	1	2	
K	2	2	3	
L	2	2	4	
M	1	1	2	
N	1	1	2	
O	1	2	2	
P	1	2	2	
Q	1	2	2	
R	1	2	2	
S	1	2	2	
T	2	2	4	
U	1	2	2	
V	2	2	4	
W	2	2	4	
X	2	2	3	
Y	2	2	4	
Z	2	2	3	

TABLE 2
SPACING BETWEEN LETTERS IN mm


CODE NUMBER	SPACING
1	19
2	15
3	10
4	5

NOTE

TO DETERMINE THE PROPER SPACING BETWEEN LETTERS, OBTAIN THE CODE NUMBER FROM TABLE 1 AND ENTER TABLE 2 FOR THAT CODE NUMBER TO GET THE SPACING. SPACING IS MEASURED HORIZONTALLY FROM THE EXTREME RIGHT EDGE OF THE PRECEDING LETTER TO THE EXTREME LEFT EDGE OF THE FOLLOWING LETTER.

STANDARD LETTERS OF 8 cm HEIGHT



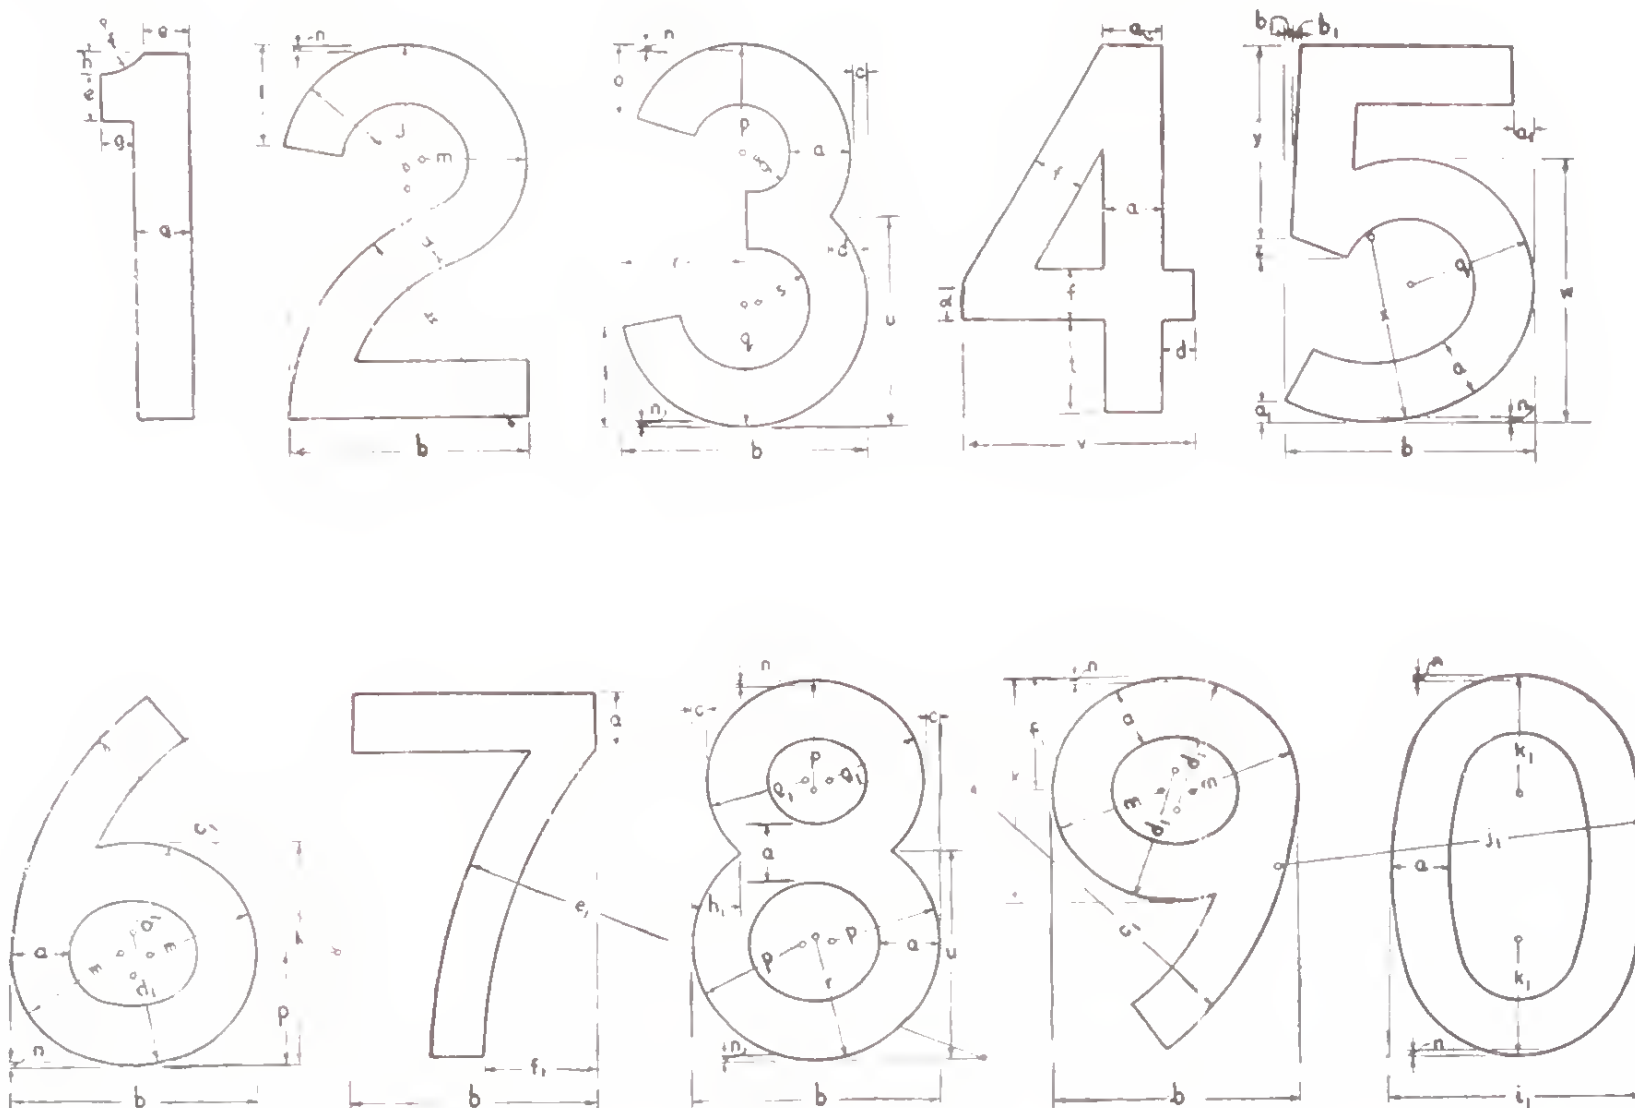

DIMENSIONS IN MILLIMETRES FOR 20 cm HIGH NUMERALS																		
a	a ₁	b	b ₁	c	c ₁	d	d ₁	e	e ₁	f	f ₁	g	g ₁	h	h ₁	i	i ₁	j
31	11	13	4	5	8	7	8	19	7	2	25	30	28	59	17			
k	k ₁	l	l ₁	m	m ₁	n	n ₁	o	o ₁	p	p ₁	q	q ₁	r	r ₁	s	s ₁	t
52	13	23	66	141	78	200	122	64	53	58	3	41						
u	u ₁	v	v ₁	w	w ₁	x	x ₁	y	y ₁	z	z ₁							
61	67	69	30	50	113	128	144	102	103	9								

SPACING BETWEEN STANDARD NUMERALS OF 100 mm HEIGHT

TABLE 1
NUMERAL TO NUMERAL
CODE NUMBER

PRECEDING NUMERAL	FOLLOWING NUMERAL		
	1, 5	2, 3, 6 8, 9, 0	4, 7
1	1	1	2
2	1	2	2
3	1	2	2
4	2	2	4
5	1	2	2
6	1	2	2
7	2	2	4
8	1	2	2
9	1	2	2
0	1	2	2

TABLE 2
SPACING BETWEEN
NUMERALS IN mm

CODE NUMBER	SPACING
1	47
2	38
4	13

NOTE:—

TO DETERMINE THE PROPER
SPACING BETWEEN NUMERAL
OBTAIN THE CODE NUMBER FROM
TABLE 1 AND ENTER TABLE 2
FOR THAT CODE NUMBER.
SPACING IS MEASURED HORIZ-
ONTALLY FROM THE EXTREME
RIGHT EDGE OF THE PRECEDING
NUMERAL TO THE EXTREME LEFT
EDGE OF THE FOLLOWING NUMERAL.

NOTE:-
TO DETERMINE THE PROPER
SPACING BETWEEN NUMERALS,
OBTAIN THE CODE NUMBER FROM
TABLE 1 AND ENTER TABLE 2
FOR THAT CODE NUMBER.
SPACING IS MEASURED HORIZONTAL-
LY FROM THE EXTREME
RIGHT EDGE OF THE PRECEDING
NUMERAL TO THE EXTREME LEFT
EDGE OF THE FOLLOWING NUMERAL.

STANDARD NUMERALS OF 20 cm HEIGHT

